


TILTING HYDRAULIC HITCH

Wear indicators to assist with scheduled maintenance inspections

Locking circuit operates with pilot or full system pressure

Rated Lifting Point

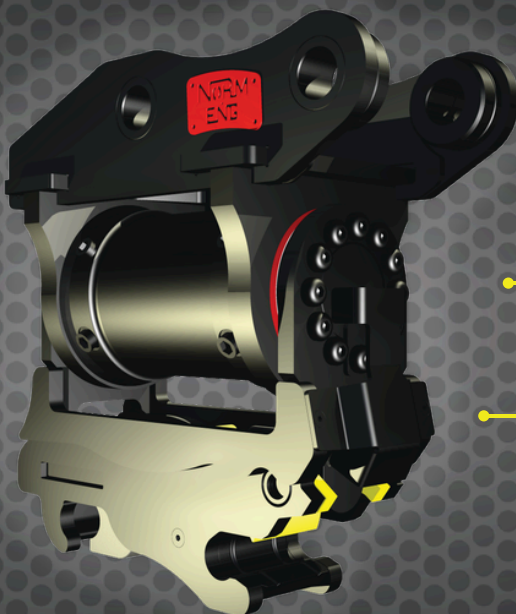

Hydraulic Hose Guard Plate

Positive Mechanical Lock (Triple Lock)

Complies with Australian (AS4772-2008) and International (ISO13031.2) Hydraulic Quick Hitch Standards

INCLUDES

FULLY COMPLIANT



WEAR RESISTANT STEEL



BUILT TO MACHINE SPECS



VISUAL LOCKING INDICATOR



RATED LIFTING POINT




SINGLE ACTION LOCK



PATENTED LOCKING SYSTEM



180° TILT RANGE



QUEENSLAND
PH: (07) 3376 3177
sales@normeng.com.au
787 Boundary Road
Darra QLD 4074

VICTORIA
PH: (03) 9775 1965
vicsales@normeng.com.au
2/45 Frankston Gardens Drive
Carrum Downs VIC 3201

NEW SOUTH WALES
PH: (02) 7246 7838
nswsales@normeng.com.au
2/3 Contaplas Street
Arndell Park NSW 2148

NEW ZEALAND
PH: (64) 7889 7080
service@normeng.co.nz
14/2582 State Highway 26
Morrinsville 3375 NZ